



**Standard Features:**

- Standard Dry Contact Inputs
- First Alarm Lock-out
- Audible Alarm with Silence Button
- No Calibration or Setup Required
- Microprocessor Controlled for High Accuracy
- Power: 117 VAC 50/60 Hz (Optional 24 VDC)
- High Noise Rejection
- CSA and NRTL Approved

**Function:**


The ANC-8 is an 8 point annunciator with audible alarm & silence button. Up to 8 dry contact inputs may be connected to the ANC-8. The first alarm to come in will be locked out to identify chain of events. This is indicated by a rapidly flashing LED for the point of first alarm.

**Specifications:**

- Input: 8 Dry contacts
- Indication: One LED per point
- Alarm Lock-out: First alarm flashes LED rapidly
- Operating Temperature: -40 Deg.C. to +50 Deg.C.
- Power: 117 VAC, 60/50 Hz  
(24VDC Available)

# ANC-8

## Enclosures & Dimensions:

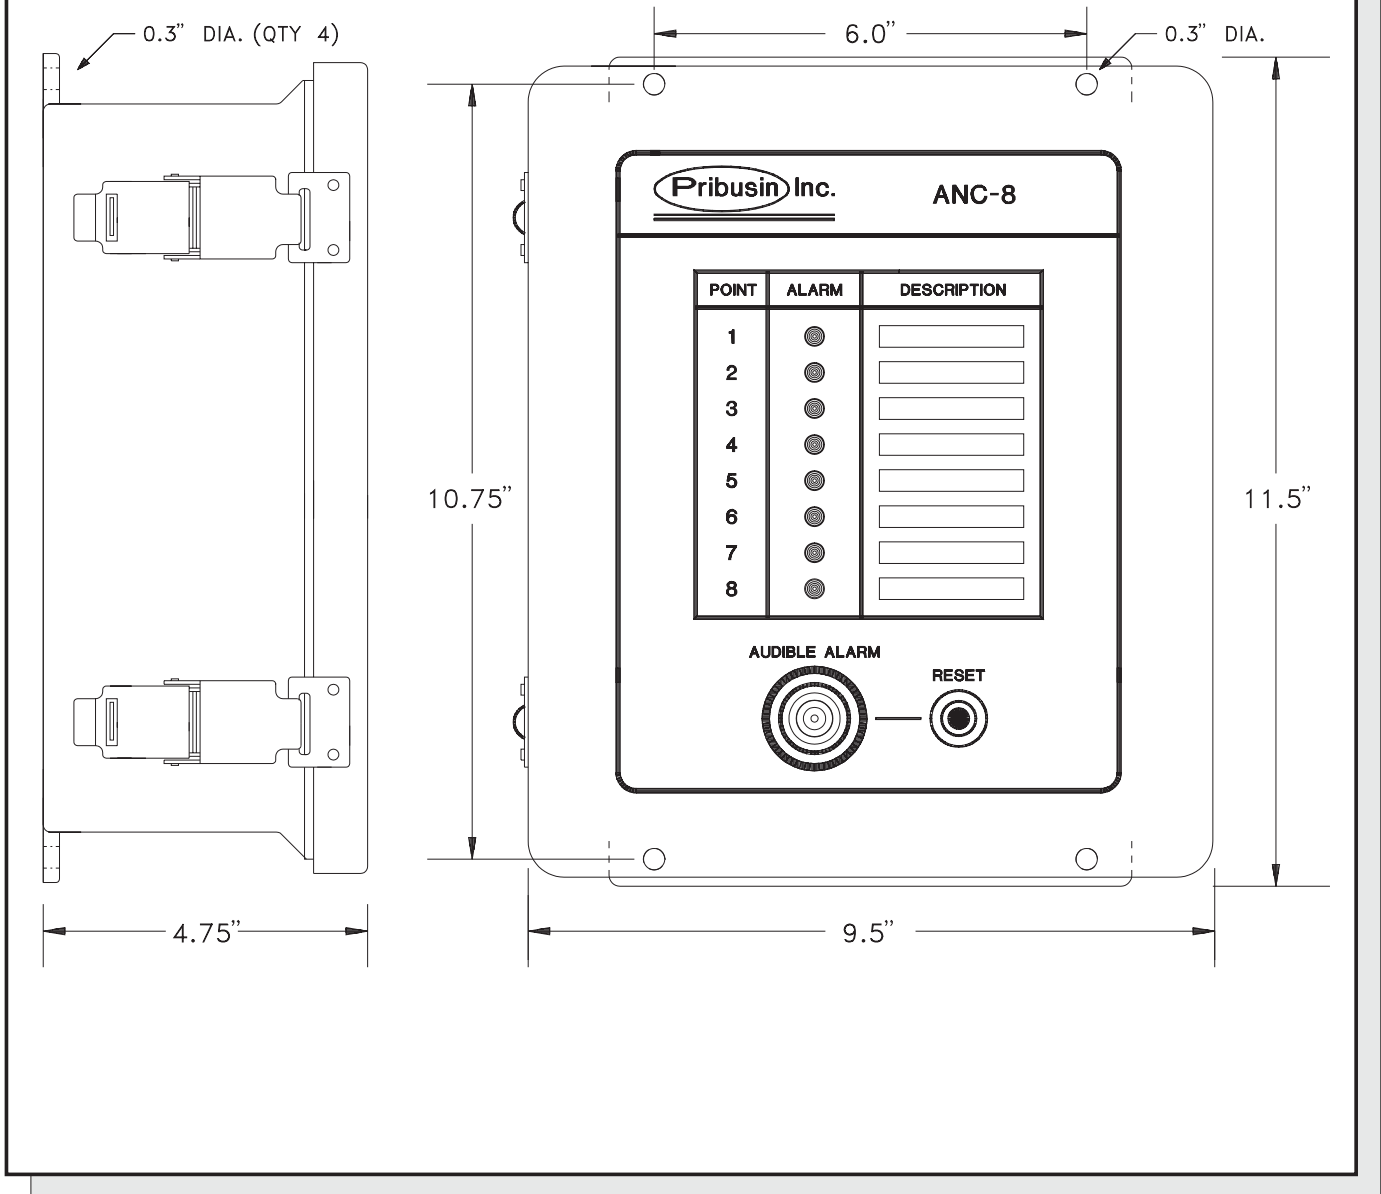

Manufactured By:

**Pribusin Inc.**

[www.pribusin.com](http://www.pribusin.com)  
[info@pribusin.com](mailto:info@pribusin.com)

**USA:**  
 Pribusin Inc.  
 4319 E. Apple Ave.  
 Muskegon, MI 49442  
 Ph: (231) 788-2900  
 Fx: (231) 788-2929



**CANADA:**  
 Pribusin Inc.  
 101 Freshway Dr. Unit 57  
 Concord, Ontario, L4K 1R9  
 Ph: (905) 660-5336  
 Fx: (905) 660-4068